

E215C



	E215C	E215C LR
ENGINE POWER	129 kW - 173 hp	
MAX OPERATING WEIGHT	23160 Kg	23700 Kg
BUCKET CAPACITY	0.52 m ³ - 1.31 m ³	0.45 m ³



BUILT AROUND YOU

AS LONG AS WE KEEP BUILDING ROADS, THERE

**10% MORE
PRODUCTIVITY**

**10% MORE
FUEL SAVINGS**



E WILL ALWAYS BE A JOURNEY TO UNDERTAKE

**EVOLUTION
IN COMFORT
AND SAFETY**

**BUILT-IN
SERVICEABILITY
AND RELIABILITY**



THE MAIN COMPONENTS OF OUR CRA

1 HEAVY-DUTY DESIGN

The C Series excavators are designed and built to deliver the ultimate reliability and durability that customers expect.

The long undercarriage provides dynamic stability and performance.

2 INTELLIGENT HYDRAULICS

New Holland's Hydrotronic combines highly advanced electronic technology with a sophisticated hydraulic system, and has been designed to maximise the machines' performance according to the job at hand. The new ECO working mode optimizes fuel consumption while maintaining good performance.



WLER EXCAVATOR

3 SCR ONLY TECHNOLOGY

Selective Catalytic Reduction (SCR) technology optimizes combustion for maximum efficiency. It reduces harmful emissions with the high combustion temperatures and the addition of AdBlue® Diesel Exhaust Fluid. This well-proven and reliable technology, used on trucks in Europe since 2004, delivers more power with less fuel.

4 NEW EVO CAB

The ROPS/FOPS compliant EVO cab provides the ultimate comfortable and safe work environment with exceptional all-round visibility and remarkably low noise and vibration levels.



MORE PRODUCTIVITY



DYNAMIC STABILITY

The heavy-duty design is a perfect match with the machine's powerful performance. The three versions (L, EL and LC) all feature a long, heavy-duty undercarriage that provides exceptional dynamic stability, ensuring a safe and productive performance on all terrains.

SUPERIOR PERFORMANCE

The exceptional stability and optimal weight distribution enable the operator to make the most of the E215C's superior breakout force and lifting capacity. The Continuous Power Boost delivers extra power as and when needed, raising hydraulic pressure from 34.3 to 37.8 Mpa. Travelling on inclines and difficult terrain is easy with the excellent drawbar pull.



TOP PERFORMANCE IN ALL WORKING CONDITIONS

INTELLIGENT HYDRAULIC SYSTEM

The Hydrotronic combines advanced electronic technology that provides full just-in-time control of all machine functions with a sophisticated high-efficiency hydraulic system. It continuously optimizes hydraulic output according to the operator's demands for the job at hand.

**+10%
PRODUCTIVITY**



A PERFECT COMBINATION OF SPEED, EFFICIENCY AND CONTROL

SPEED AND CONTROL WITH D.O.C.

With the Dipperstick Optimized Control (D.O.C.), the excavator always works with two pumps to ensure the operator always has the flow and speed he needs. The Hydrotonic continuously adjusts the flow and speed to match the requirements, ensuring a smooth transition when switching from lighter work to heavy digging.

SPEED AND EFFICIENCY WITH CONFLUX

The Conflux is an automatic hydraulic regeneration feature that diverts unused oil to feed the cylinder that needs it. This process is faster and more energy efficient than re-pumping oil, resulting in faster “dipper in” movement and greater efficiency.

FAST CYCLE TIME

The integrated swing priority ensures a seamless transition of additional pump power to the swing function when needed.



FLEXIBILITY AND VERSATILITY

The new generation Advanced Electronic Processor (A.E.P.) provides highly responsive controls and delivers extra power when needed. The operator can easily monitor and select the main working parameters, maintenance notifications, self diagnosis and operating data storage. Attachment management is extremely versatile, as the operator can set flow and pressure with up to 20 attachment pre-settings.

SMOOTH OPERATIONS

The high-efficiency hydraulics and new joysticks result in smooth operation and outstanding control, especially during simultaneous operation, leveling and other tasks requiring high precision. The optional Hydraulic Proportional Controls (HPC) further increase productivity and reduce operator fatigue.

EFFICIENCY



THE MOST FUEL EFFICIENT CRAWLER EXCAVATOR WE HAVE EVER BUILT

New Holland excavators have a reputation for industry leading fuel efficiency; The C Series takes it to a whole new level.

SCR ONLY TECHNOLOGY

New Holland's SCR solution, developed by FPT Industrial to meet Tier 4i (EU Stage 3B) emissions regulations, reduces PM levels with high combustion temperatures and breaks down NOx with AdBlue.



GET MORE POWER WITH SCR

The SCR solution relies on an after-treatment system, so that the engine can focus on generating more power, torque and a faster response.

ENGINE AND HYDRAULIC POWER: THE PERFECT MATCH

The high-efficiency hydraulics supply high flow at low rpm, maximizing fuel efficiency. In addition, the Hydrotonic optimizes the performance and efficiency of the machine: it maintains engine speed at the required level, preventing it from dropping. It reduces pump displacement in case of overload and continuously adjusts oil flow to avoid overloading the engine or the pumps.

**-10%
FUEL**



HIGH-EFFICIENCY HYDRAULICS

The new improved hydraulic system minimizes friction losses and pressure drops, while the Hydrotronic advanced electronic technology ensures 100 per cent pump utilization in all applications. The result: maximum controllability, speed and power combined with minimum fuel consumption.



OPTIMIZE EFFICIENCY WITH WORKING MODES

- H Heavy-duty working mode for maximum speed and productivity
- S Standard mode for performance and fuel savings
- E Eco mode which optimizes fuel consumption

TAKE CONTROL OF YOUR MACHINE'S EFFICIENCY

The new multifunctional monitor puts the operator in full control of the machines' efficiency, with the fuel economy meter and ECO icon indicating when the machine is operating most efficiently.

A COMMITTED PARTNER



DESIGNED WITH ENVIRONMENTAL CARE

New Holland has a long history of designing products with emissions levels well below regulatory levels.

Low Emissions

New Holland's SCR technology, developed to meet Tier4 interim (EU Stage IIB) regulations, not only dramatically reduces emissions levels, but also achieves exceptional fuel efficiency, which further reduces the environmental impact of the machine.

Today our E215C Series excavators emissions levels are as low as:

CO: 0.042 g/kWh, HC: 0.03 g/kWh, NOx: 3.01 g/kWh, PM: 0.009 g/kWh

Low impact

The AdBlue additive is a solution of urea and demineralised water: clean, harmless and environmentally friendly.

Yes to the biodiesel!

All New Holland Tier4 interim compliant products which use our SCR technology can use blends of 20% biodiesel.

LEADER IN SUSTAINABILITY

New Holland's extensive offering of low emission products, our continued focus on reducing our environmental footprint throughout our products' entire life cycle and our involvement in the community have contributed to our parent company, Fiat Industrial, being recognised as Industry Leader by the Dow Jones Sustainability Index (DJSI) World and DJSI Europe. These prestigious equity indexes only admit companies that are best-in-class in managing their businesses, from an economic as well as social and environmental perspective. Fiat Industrial received a score of 81/100 compared to an average of 49/100 for all companies in its sector, and was awarded first place.

EVOLUTION IN SAFETY

The reinforced structure of the cab complies with ROPS and FOPS standards. Together with the optional front guard it contributes to providing a safe working environment for the operator.

ROPS certified cab - ISO 12117-2
FOPS protection - ISO 10262 level 2



EXCELLENT ALL-ROUND VISIBILITY

The EVO cab is designed to maximize visibility, with a full size right window and standard rear-view camera.



2 SAFE OBJECT HANDLING

C Series excavators are equipped with all the safety devices required by European Standards EN 474-5 : 1996 for object handling operations .The optional Object Handling Kit is available, for maximum operator confidence.The Heavy Lift function provides additional lifting capacity and more precision during load placement, which add up to safer operation.

WELCOME ON BOARD



EVOLUTION IN COMFORT

The spacious EVO cab is designed to maximize the operator's comfort and performance. All switches and controls are ergonomically positioned on the right side, easy to find and to reach; opening and closing the front window is easy with the one-touch lock release; and the extra wide door provides easy access.

A FULLY ADJUSTABLE WORKSTATION

The seat is adjustable in all directions, independently or with the side consoles. The armrests, integrated in the side consoles, can be placed in four different positions and inclined, enabling the operator to tailor the workstation for maximum convenience and comfort. The optional air-suspension seat with heated cushion can add further to the operator's comfort.

SUPERIOR OPERATOR ENVIRONMENT

Long working days will feel shorter with the new radio with Bluetooth and USB, and the automatic air-conditioning system.



LOW VIBRATION AND NOISE LEVEL

Six silicon liquid filled viscous dampers and enhanced soundproofing of the EVO cab result in remarkably low noise and vibration levels, adding to the operator's comfort and reducing fatigue.

OUTSTANDING VISIBILITY

The EVO cab provides excellent all-round visibility, with a full size right window and standard rear-view camera. The new standard skylight with sunshade provides a clear view to overhead obstacles.

EASY TO OPERATE

The new multifunctional monitor is easy to read with a full-color screen dedicated to the rear wide-angle camera. The operator can set service interval reminders for engine oil, hydraulic oil, fuel and filters. The auxiliary hydraulics can be adjusted from the control monitor to match pressure and flow to the attachment. Self-diagnostics with fault code memory make it easy to check and adjust system pressures, engine speed, travel speed, hydraulic pressure and other operating functions. Work and attachment modes are easy to select and are clearly displayed on the monitor.

BUILT-IN SERVICEABILITY AND RELIA

DESIGNED TO CUT OPERATING COSTS

The side-by-side radiator layout improves cooling performance and is exceptionally easy to clean. Easy-to-change engine oil and fuel filters and ground access to all daily service points contribute to maximizing the machine's uptime.

LESS MAINTENANCE WITH SCR TECHNOLOGY

With SCR technology there is no need for a particulate filter, resulting in savings on maintenance. The system is designed so that the AdBlue tank only needs to be refilled every four refuelling stops, depending on the job. In addition, it doesn't require costly specific oils and has a high fuel compatibility unmatched by other Tier4i solutions.



SERVICE POINTS AT GROUND LEVEL

The engine oil filter, fuel filter and water separator, which removes contaminants and water, are key for good engine performance and durability. They are remote mounted and easy to reach from ground level for easy maintenance.



CENTRALISED LUBRICATION

Grouped and centralised greasing points, allow all boom wear points to be easily greased from ground level at 500-hour service intervals.



LONG LIFE HYDRAULIC OIL

The long-life hydraulic oil has excellent anti-emulsion characteristics as well as an optimized mix of anti-wear and anti-oxidants additives that extend service intervals to 5000 hours, resulting in an impressive reduction in operation costs and environmental impact.

MORE RELIABILITY WITH SCR

Our SCR technology is a highly reliable proven technology. It requires no additional maintenance or cooling surface, and works perfectly in cold weather. Even at temperatures below $-11^{\circ}\text{C}/12^{\circ}\text{F}$, when the AdBlue may be frozen, the engine will cold start and run without derating.



MORE RELIABILITY AND DURABILITY WITH THE HEAVY DUTY DESIGN

Booms and arms were designed using advanced CAD and FEM (Finite Elements Methodology) Systems to maximize strength in those areas where stresses are concentrated. The result is a strong Heavy Duty front attachment that can deal with the toughest applications.

BUCKET LINKAGE WITH DOUBLE BUSHING

Additional external bushings made of anti-wear steel provide extra protection to the arm and bucket's long-life internal bushing. When the radial surface becomes worn, these bushings are easy to change, increasing pin and bushing durability while reducing operating costs.

ARM PROTECTION

An optional arm protection is available to further extend durability even in rocky applications.

BUILT TO LAST

The heavy-duty X-frame undercarriage is built to last, with rollers, sprockets and travel motors sealed for a long life. The two track frames come with a standard central mounted track guide. Four additional track guides are also available as an option for work in particularly uneven or rocky terrain. They help keep the chains on the rollers and protect them, ensuring greater durability, efficiency and safety.



SPECIFICATIONS



ENGINE TIER 4 INTERIM

Make and model FPT F4HFE613S-A0002
 Engine Power (ISO 14396/ECE R120) 129 kW/173 hp (2000 rpm)
 Maximum torque 740 Nm (1400 rpm)
 Type...Water-cooled, direct injection type diesel engine with intercooler turbo-charger electric common-rail, Selective Catalytic Reduction (SCR)
 Displacement 6.7 l
 N. of cylinders 6
 Bore x stroke 104 x 132 mm

Remote engine oil filter for easy replacement

Electronic engine rpm control, dial type

Auto-Idling selector returns engine to minimum rpm when all controls are in neutral position

-25° outside temperature start as standard equipment

The engine complies with 97/68/EC standards stage 3B (Tier4 interim)



ELECTRICAL SYSTEM

Voltage / Alternator 24V / 70 A
 Starter motor 4 kW
 Maintenance-free batteries 2 x 12V / 160 Ah



TRANSMISSION

Typehydrostatic, two-speed, Automatic DownShift
 Travel motors axial piston type, double displacement
 Brakes automatic discs type
 Final drive oil bath, planetary reduction
 Gradeability 70% (35°)
 Travel speeds: low 0 - 3.7 km/h / high 0 - 5.7 km/h
 Drawbar pull 222 kN



UNDERCARRIAGE

X-frame undercarriage design

Reinforced track chain with sealed bushing

	E215C EL	E215C L	E215C LC
Track rollers (each side)	8	8	8
Carrier rollers (each side)	2	2	2
Length of track on ground (mm)	3660	3660	3660
Gauge (mm)	1990	2200	2390
Shoes (mm)	500-600	600-700	600-700
	700	800-900	800-900

Shoe type Tractor type triple grouser shoe
 No. for each side 49
 Height of grouser shoe 26 mm



HYDRAULIC SYSTEM

High capacity double pumps with electronic delivery adjustment.
 Variable displacement pistons pumps revert in neutral automatically to zero. Main Control Valve with Fail Safe Function and Anti drift valve.

H.A.O.A. (Hydrotronic Active Operation Aid)

E.S.S.C. (Engine Speed Sensing Control)

D.O.C. (Dipperstick Optimized Control)

C.P.B. (Continuous Power Boost)

New generation A.E.P. (Advanced Electronic Processor)

3 working Modes

H Mode - Heavy duty excavation work

S Mode - Standard digging and loading work

E Mode - Fuel Economy

Attachments Modes

Breaker (One-way hydraulic flow)

Nibbler (Two-way hydraulic flow)

Attachments flow and pressure setting from cab, 20 presets storage

Hydraulic pump

Max flow at rated engine speed 2 x 220 l/min

Piloting circuit gear type pump max 20 l/min

Directional control valves

Type 8-spool valve

System Pressures

Boom, Arm&Bucket 34.3 MPa

with Power Boost 37.8 MPa

Travel 34.3 MPa

Swing 28 MPa

Pilot control Circuit 5 MPa



CAPACITIES

Engine oil 17 l

Fuel tank 320 l

Hydraulic system (incl. 167 l tank) 255 l

Cooling system 24 l

AdBlue tank (Urea) 89 l



SWING

Swing motor axial piston type

Swing brake hydraulic brake

Swing speed 0-12.8 rpm



CAB AND CONTROLS

Operator's cab

Structure Fully enclosed steel structure

EVO operator cab evolution in comfort and safety compliant to ROPS (ISO 12117-2) and FOPS (ISO 10262 level II) standards

Rear camera standard

Monitor integrated multi-function control monitor with integrated rear view camera display

Operator's seat

Operator's seat Adjustable and reclining device

Operation

Travel Two hand levers or two foot pedals for forward and backward operations of each track independently

Excavating and swing Two hand levers for four operations

Sound Level


External guaranteed sound level

(EU Directive 2000/14/EC) LwA 102 dB(A)

Operator cab sound pressure level (ISO 6396 LpA 69 dB(A)

DIMENSIONS - MONOBOOM

Boom length 5.65 m

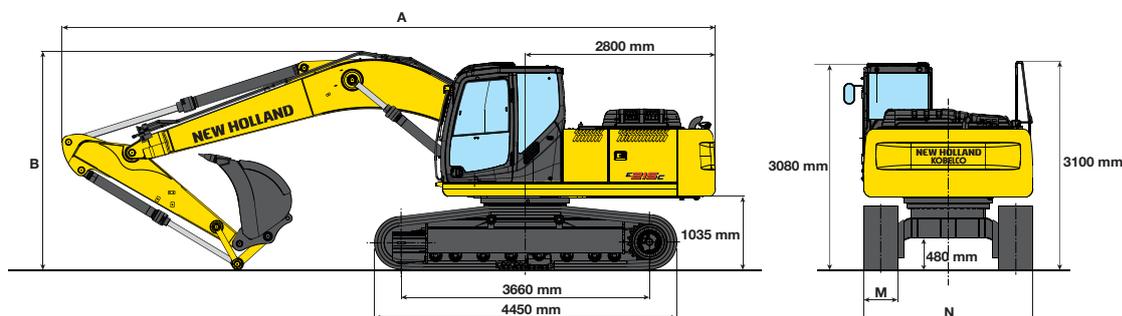

EL / L / LCVERSION


ARM		2080	2400	2940	3500
A - Overall length	mm	9620	9580	9500	9570
B - Boom height in transport position	mm	3250	3150	2970	3160
Overall height	mm	3250	3150	3100	3160

OPERATING WEIGHT - MONOBOOM

		EL VERSION				L VERSION				LC VERSION			
M - Shoe width	mm	500	600	700	600	700	800	900	600	700	800	900	
N - Maximum width	mm	2490	2590	2690	2800	2900	3000	3100	2990	3090	3190	3290	
Operating weight*	kg	21040	21290	21560	21340	21620	21910	22170	21400	21670	21960	22230	
Ground pressure*	bar	0.56	0.48	0.41	0.48	0.41	0.37	0.33	0.48	0.42	0.37	0.33	

* 2400 mm arm

DIMENSIONS - TRIPLE ARTICULATION

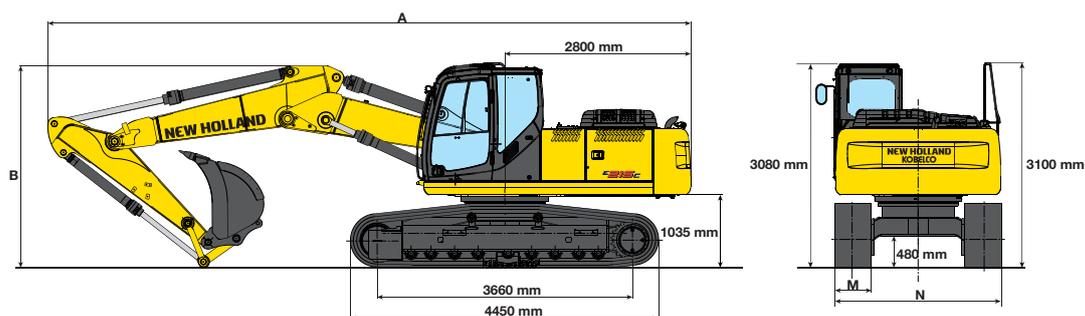

EL / L / LCVERSION

ARM		2080	2400	2940	3500
A - Overall length	mm	9690	9670	9650	9630
B - Boom height in transport position	mm	3070	3020	2960	3250
Overall height	mm	3100	3100	3100	3250


OPERATING WEIGHT - TRIPLE ARTICULATION

		EL VERSION				L VERSION				LC VERSION			
M - Shoe width	mm	500	600	700	600	700	800	900	600	700	800	900	
N - Maximum width	mm	2490	2590	2690	2800	2900	3000	3100	2990	3090	3190	3290	
Operating weight*	kg	21720	21970	22240	22020	22290	22580	22850	22070	22350	22640	22900	
Ground pressure*	bar	0.58	0.49	0.43	0.49	0.43	0.38	0.34	0.49	0.43	0.38	0.34	


* 2400 mm arm

DIGGING PERFORMANCE

MONOBOOM

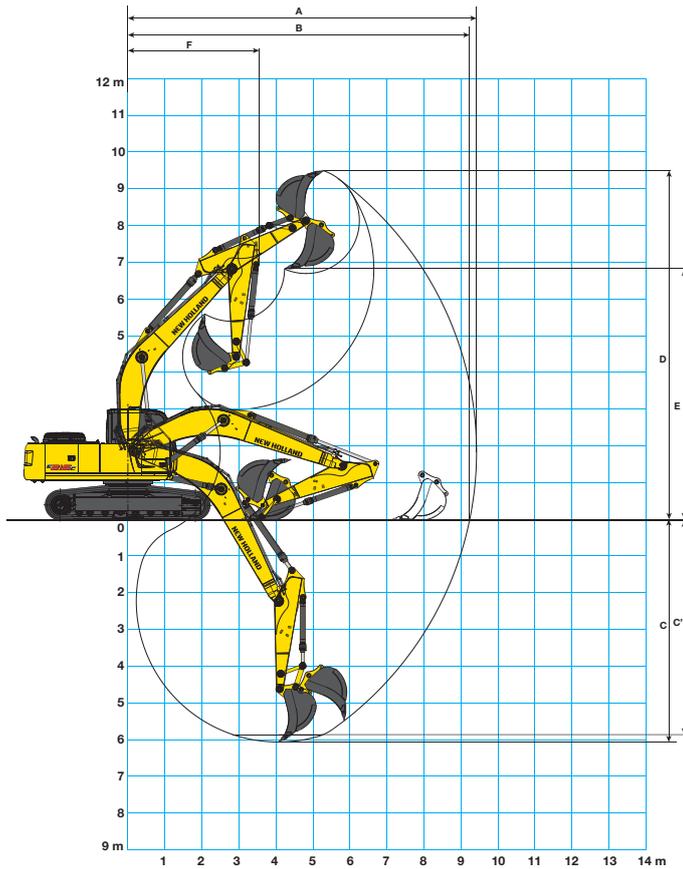

TRIPLE ARTICULATION

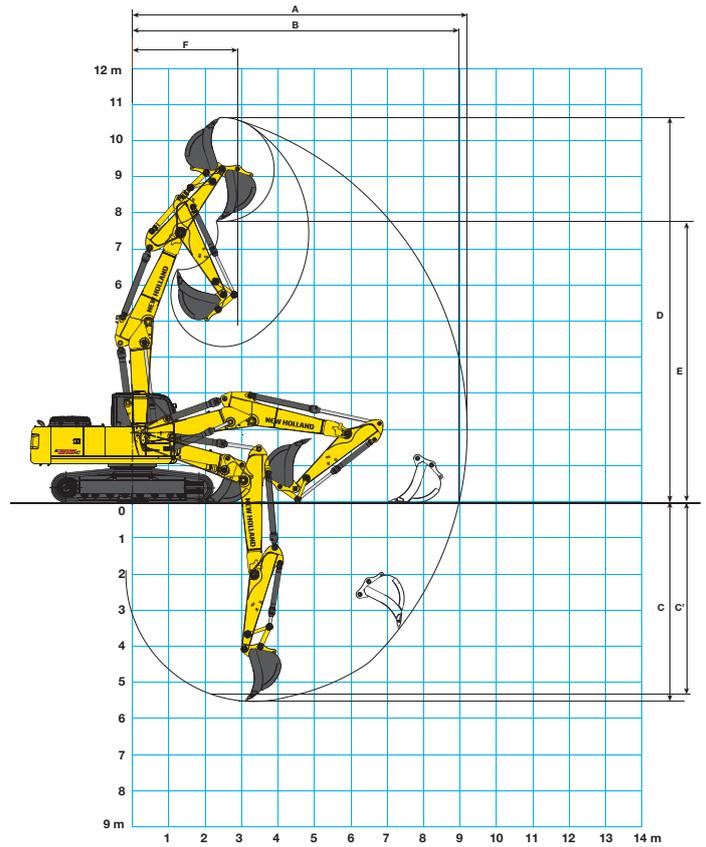

ARM	MONOBOOM				TRIPLE ARTICULATION				
	2080	2400	2940	3500	2080	2400	2940	3500	
A - Max. digging reach	mm	9160	9430	9910	10350	9200	9580	10080	10530
B - Max. digging reach at ground level	mm	8970	9240	9730	10170	8970	9390	9900	10370
C - Max. digging depth	mm	5740	6070	6610	7170	5530	5830	6380	6920
C' - 2,4 mt level digging depth	mm	5530	5870	6430	7000	5330	5650	6210	6760
D - Max. digging height	mm	9420	9500	9710	9740	10650	10840	11240	11500
E - Max. dumping clearance	mm	6610	6700	6930	7170	7760	7960	8360	8630
F - Min. swing radius	mm	3670	3550	3530	3470	2890	2800	2800	2800

BREAKOUT FORCE

ARM	2080	2400	2940	3500	
Bucket	daN	15500	15500	15500	15500
Dipperstick	daN	15200	13150	10900	9000

WITH "POWER BOOST" ON

ARM	2080	2400	2940	3500	
Bucket	daN	16900	16900	16900	16900
Dipperstick	daN	16500	14250	11800	9800

MONOBOOM

TRIPLE ARTICULATION

BUCKETS			E215C EL				E215C L				E215C LC				E215C EL				E215C L				E215C LC			
Width mm	Capacity SAE J296 (ISO 7451) m ³	Weight kg	Arm mm				Arm mm				Arm mm				Arm mm				Arm mm				Arm mm			
			2080	2400	2940	3500	2080	2400	2940	3500	2080	2400	2940	3500	2080	2400	2940	3500	2080	2400	2940	3500	2080	2400	2940	3500
750	0.52	505																								
850	0.63	540																								
1000	0.79	635																								
1200	1.00	650																								
1300	1.10	700																								
1500	1.31	760																								

General digging work (specific weight of material < 1.8 t/m³)

Slightly heavy digging work (specific weight of material < 1,5 t/m³)

Loading work (specific weight of material < 1,2 t/m³)

E215C

LIFTING CAPACITY EL VERSION

MONO BOOM - DIPPERSTICK 2080 mm

HEIGHT	RADIUS OF LOAD												
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH		REACH m
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	
+7.5 m											6.4*	6.3	5.12
+6.0 m							6.2*	4.9			6.1*	4.4	6.42
+4.5 m			10.9*	10.9*	7.8*	7.1	6.6*	4.7			6.1*	3.7	7.19
+3.0 m					9.5*	6.5	7.3*	4.5	5.9	3.3	5.8	3.3	7.58
+1.5 m					10.7*	6.1	7.9*	4.3	5.8	3.2	5.7	3.2	7.65
0 m					11.0*	5.9	7.7*	4.1			5.8	3.2	7.43
-1.5 m			13.5*	10.7	10.5*	5.9	7.7	4.1			6.4	3.5	6.87
-3.0 m			11.9*	10.9	9.1*	6.0					6.8*	4.3	5.88
-4.5 m											6.2*	6.2*	4.15

TRIPLE ARTICULATION - DIPPERSTICK 2080 mm

HEIGHT	RADIUS OF LOAD														
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH		REACH m		
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE			
+9.0 m													7.0*	7.0*	3.73
+7.5 m							7.4*	7.4*					5.8*	5.2	5.8
+6.0 m							7.6*	7.5*	6.2*	5.1			5.0*	3.9	6.97
+4.5 m					11.9*	11.9*	8.8*	7.4*	6.5*	5.0*	5.1*	3.4*	4.6*	3.3	7.68
+3.0 m					12.3*	13.7	10.5*	7.0	7.3*	4.8	5.6*	3.3	4.6*	3.0	8.05
+1.5 m					16.4*	11.0	10.8*	6.5	7.9*	4.5	5.7	3.2	4.6*	2.8	8.12
0 m					16.8*	10.5	10.9*	6.1	7.9	4.2	5.7	3.1	4.9*	2.9	7.91
-1.5 m	19.6*	19.6*	16.2*	10.5	10.9*	6.0	7.7	4.1					5.1*	3.1	7.38
-3.0 m	23.0*	23.0*	14.3*	10.8	9.4*	6.0	5.2*	4.0					4.2*	3.7	6.47

MONO BOOM - DIPPERSTICK 2400 mm

HEIGHT	RADIUS OF LOAD												
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH		REACH m
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	
+7.5 m											4.9*	4.9*	5.59
+6.0 m							5.8*	4.9			4.7*	4.0	6.8
+4.5 m					7.3*	7.1	6.2*	4.7	4.9*	3.4	4.7*	3.4	7.52
+3.0 m					8.9*	6.5	6.9*	4.5	5.9	3.3	5.0	3.1	7.9
+1.5 m					10.3*	6.0	7.6*	4.2	5.7	3.2	5.3	2.9	7.97
0 m			7.6*	7.6*	10.9*	5.8	7.7	4.1	5.6	3.1	5.4	3.0	7.76
-1.5 m	8.6*	8.6*	12.7*	10.4	10.6*	5.7	7.6	4.0			5.9	3.2	7.22
-3.0 m	13.4*	13.4*	12.8*	10.6	9.4*	5.8	7.0*	4.1			6.6*	3.9	6.29
-4.5 m			9.1*	9.1*	6.7*	6.1*					6.4*	5.8	4.72

TRIPLE ARTICULATION - DIPPERSTICK 2400 mm

HEIGHT	RADIUS OF LOAD														
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH		REACH m		
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE			
+9.0 m													5.1*	5.1*	4.43
+7.5 m							7.0*	7.0*	4.3*	4.3*			4.4*	4.4	6.27
+6.0 m							7.2*	7.2*	5.9*	5.1			4.2*	3.5	7.36
+4.5 m					12.8*	12.8*	8.3*	7.3	6.2*	5.0	5.1*	3.4	4.1*	3.0	8.04
+3.0 m					14.4*	12.3	10.3*	7.0	6.9*	4.8	5.4*	3.3	4.2*	2.0	8.38
+1.5 m					16.0*	11.2	10.7*	6.5	7.8	4.4	5.7	3.2	4.2*	2.6	8.45
0 m	16.2*	16.2*	16.6*	10.5	10.7*	6.1	7.8	4.2	5.6	3.0	4.5*	2.7	8.25		
-1.5 m	16.7*	16.7*	16.4*	10.4	10.8*	5.9	7.7	4.0			4.9*	2.9	7.75		
-3.0 m	20.8*	20.8*	15.1*	10.6	9.9*	5.9	6.2*	4.0			4.2*	3.4	6.89		
-4.5 m			9.1*	9.1*											

MONO BOOM - DIPPERSTICK 2940 mm

HEIGHT	RADIUS OF LOAD												
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH		REACH m
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	
+7.5 m							4.2*	4.2*			3.5*	3.5*	6.27
+6.0 m							5.3*	5.0			3.4*	3.4*	7.36
+4.5 m							5.8*	4.8	5.1*	3.5	3.4*	3.1	8.04
+3.0 m			12.8*	11.9	8.3*	6.7	6.6*	4.6	5.7*	3.3	3.5*	2.9	8.39
+1.5 m			7.1*	7.1*	9.9*	6.2	7.4*	4.3	5.8	3.2	3.8*	2.7	8.46
0 m			8.3*	8.3*	10.8*	5.9	7.7	4.1	5.7	3.1	4.4*	2.8	8.25
-1.5 m	7.6*	7.6*	11.7*	10.4	10.8*	5.8	7.6	4.0	5.6	3.1	5.3*	3.0	7.75
-3.0 m	11.3*	11.3*	14.0*	10.5	10.0*	5.8	7.5*	4.0			6.3*	3.4	6.9
-4.5 m			10.9*	10.9	8.0*	6.0					6.3*	4.7	5.51

TRIPLE ARTICULATION - DIPPERSTICK 2940 mm

HEIGHT	RADIUS OF LOAD														
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH		REACH m		
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE			
+9.0 m							5.8*	5.8*					3.6*	3.6*	5.33
+7.5 m							6.3*	6.3*	5.4*	5.0			3.1*	3.1*	6.93
+6.0 m							6.6*	6.6*	5.5*	5.1	4.4*	3.4	3.0*	3.0*	7.93
+4.5 m					11.2*	11.2*	7.6*	7.3	5.8*	5.1	4.9*	3.5	3.0*	2.8	8.56
+3.0 m					15.0*	12.4	9.8*	7.2	6.5*	4.8	5.1*	3.4	3.0*	2.6	8.89
+1.5 m					15.7*	11.8	10.7*	6.7	7.5*	4.6	5.5*	3.3	3.2*	2.5	8.95
0 m	11.4*	11.4*	16.5*	10.8	10.7*	6.2	7.8	4.3	5.7*	3.1	3.6*	2.5	8.76		
-1.5 m	14.0*	14.0*	15.5*	10.5	10.9*	5.9	7.8	4.1	5.6	3.0	4.1*	2.6	8.29		
-3.0 m	16.8*	16.8*	12.0*	10.9	10.5*	5.9	7.2*	3.8			4.3*	3.0	7.49		
-4.5 m	19.9*	19.9*	18.5*	18.5*	7.2*	5.9									

MONO BOOM - DIPPERSTICK 3500 mm

HEIGHT	RADIUS OF LOAD												
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH		REACH m
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	
+7.5 m											3.1*	3.1*	6.82
+6.0 m									3.7*	3.5	3.0*	3.0*	7.84
+4.5 m							5.2*	4.8	4.9*	3.4	3.0*	2.8	8.47
+3.0 m			10.8*	10.8*	7.4*	6.8	6.0*	4.5	5.3*	3.3	3.1*	2.6	8.81
+1.5 m			10.7*	10.7*	9.2*	6.2	6.9*	4.2	5.7	3.1	3.4*	2.5	8.87
0 m	4.2*	4.2*	9.2*	9.2*	10.4*	5.8	7.6*	4.0	5.5	3.0	3.8*	2.5	8.68
-1.5 m	7.0*	7.0*	11.3*	10.1	10.7*	5.6	7.5	3.9	5.5	2.9	4.6*	2.6	8.21
-3.0 m	10.0*	10.0*	14.9*	10.2	10.2*	5.6	7.5	3.8			5.6	3.0	7.4
-4.5 m	13.7*	13.7*	12.3*	10.5	8.7*	5.7	6.3*	3.9			6.2	3.9	6.13

TRIPLE ARTICULATION - DIPPERSTICK 3500 mm

HEIGHT	RADIUS OF LOAD														
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		9.0 m		AT MAX REACH		REACH m
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	
+9.0 m													3.1*	3.1*	6.03
+7.5 m									4.9*	4.9*			2.8*	2.8*	7.48
+6.0 m									5.0*	5.0	4.3*	3.6	2.7*	2.7*	8.42
+4.5 m							6.7*	6.7*	5.3*	4.9*	4.5*	3.6	2.6*	2.5	9.01
+3.0 m	19.3*	19.3*	14.2*	12.4	8.5*	7.1	6.0*	4.8	4.7*	3.4	2.8*	1.6	2.7*	2.3	9.32
+1.5 m	10.3*	10.3*	15.3*	12.0	10.4*	6.7	6.9*	4.6	5.1*	3.2	3.8*	2.3	2.9*	2.2	9.38
0 m	10.8*	10.8*	16.1*	10.9	10.5*	6.2	7.7	4.2	5.5*	3.0			3.2*	2.2	9.2
-1.5 m	12.8*	12.8*	16.4*	10.4	10.6*	5.8	7.6	4.0	5.5	2.9			3.7*	2.3	8.76
-3.0 m	15.0*	15.0*	16.1*	10.2	10.6*	5.7	7.5	3.8	4.3*	2.9			4.2*	2.6	8.01
-4.5 m	16.7*	16.7*	13.9*	10.5	8.6*	5.7	4.9*	3.9					3.5*	3.2	6.86

All the lift capacity values are in tonnes and without bucket

As per ISO 10567 the indicated load is no more than 87% of hydraulic system lifting capacity or 75% of static tipping load. Values marked with an asterisk are limited by the hydraulic system.

E215C

LIFTING CAPACITY L VERSION

MONO BOOM - DIPPERSTICK 2080 mm

HEIGHT	RADIUS OF LOAD												REACH m	
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH			
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE		
+7.5 m												6.4*	6.4	5.12
+6.0 m							6.2*	5.4				6.2*	4.9	6.42
+4.5 m			10.9*	10.9	7.8*	7.8	6.6*	5.3				6.1*	4.1	7.19
+3.0 m					9.5*	7.4	7.3*	5.0	6.0	3.6		5.9	3.7	7.58
+1.5 m					10.7*	6.9	7.9*	4.8	5.8	3.6		5.7	3.5	7.65
0 m					11.0*	6.7	7.8	4.7				5.9	3.6	7.43
-1.5 m			13.5*	12.5	10.5*	6.7	7.8	4.6				6.5	4.0	6.87
-3.0 m			11.9*	11.9*	9.1*	6.8						6.9*	4.9	5.88
-4.5 m												6.3*	6.3*	4.15

TRIPLE ARTICULATION - DIPPERSTICK 2080 mm

HEIGHT	RADIUS OF LOAD												REACH m				
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH						
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE					
+9.0 m															3.73		
+7.5 m							7.4*	7.4*						5.8*	5.7	5.8	
+6.0 m							7.6*	7.6*	6.2*	5.5				5.0*	4.2	6.97	
+4.5 m							11.9*	11.9*	8.8*	8.0	6.5*	5.4	5.1*	3.7	4.6*	3.6	7.68
+3.0 m							13.7*	13.6*	10.5*	7.7	7.3*	5.3	5.6*	3.6	4.6*	3.3	8.05
+1.5 m							16.4*	12.6	10.8*	7.2	8.0	5.0	5.8	3.5	4.6*	3.1	8.12
0 m							16.8*	12.1	10.9*	6.8	8.0	4.7	5.7	3.4	4.9*	3.2	7.91
-1.5 m	19.6*	19.6*	16.2*	12.1	10.9*	6.7	7.8	4.5						5.1*	3.5	7.38	
-3.0 m	23.0*	23.0*	14.3*	12.4	9.4*	6.7	5.2*	4.5						4.2*	4.1	6.47	

MONO BOOM - DIPPERSTICK 2400 mm

HEIGHT	RADIUS OF LOAD												REACH m	
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH			
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE		
+7.5 m												4.9*	4.9*	5.59
+6.0 m							5.8*	5.5				4.7*	4.5	6.8
+4.5 m						7.3*	7.3	6.2*	5.3	4.9*	3.8	4.7*	3.8	7.52
+3.0 m						8.9*	7.4	6.9*	5.0	5.9	3.7	5.0	3.4	7.9
+1.5 m						10.3*	6.9	7.6*	4.8	5.8	3.6	5.3	3.3	7.97
0 m			7.6*	7.6	10.9*	6.6	7.8	4.6	5.7	3.5	5.5	3.4	3.4	7.76
-1.5 m	8.6*	8.6*	12.7*	12.2	10.6*	6.6	7.7	4.5				6.0	3.6	7.22
-3.0 m	13.4*	13.4*	12.8*	12.5	9.5*	6.7	7.0*	4.6				6.6	4.4	6.29
-4.5 m			9.1*	9.1*	6.8*	6.8*						6.4	6.4*	4.72

TRIPLE ARTICULATION - DIPPERSTICK 2400 mm

HEIGHT	RADIUS OF LOAD												REACH m						
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH								
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE							
+9.0 m														5.1*	5.1*	4.43			
+7.5 m									7.0*	7.0*	4.3*	4.3*			4.4*	4.4*	6.27		
+6.0 m									7.2*	7.2*	5.9*	5.5*			4.2*	3.9	7.36		
+4.5 m									12.8*	12.8*	8.3*	7.9	6.2*	5.4	5.1*	3.8	4.1*	3.3	8.04
+3.0 m									14.4*	13.5	10.3*	7.7	6.9*	5.2	5.4*	3.6	4.2*	3.0	8.38
+1.5 m									16.0*	12.8	10.7*	7.3	7.9*	4.9	5.8*	3.5	4.2*	2.9	8.45
0 m	16.2*	16.2*	16.6*	12.1	10.7*	6.8	7.9	4.7	5.7	3.4	4.5*	3.0	3.0	4.5*	3.0	8.25			
-1.5 m	16.7*	16.7*	16.4*	11.9	10.8*	6.6	7.8	4.5				4.9*	3.2	7.75					
-3.0 m	20.8*	20.8*	15.1*	12.2	9.9*	6.6	6.2*	4.5				4.2*	3.7	6.89					
-4.5 m			9.1*	9.1*															

MONO BOOM - DIPPERSTICK 2940 mm

HEIGHT	RADIUS OF LOAD												REACH m	
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH			
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE		
+7.5 m							4.2*	4.2*				3.5*	3.5*	6.27
+6.0 m							5.3*	5.3*				3.4*	3.4*	7.36
+4.5 m							5.8*	5.4	5.1*	3.9		3.4*	3.4*	8.04
+3.0 m			12.9*	12.9*	8.3*	7.6	6.6*	5.1	5.7*	3.7	3.5*	3.2	3.2	8.39
+1.5 m			7.1*	7.1*	9.9*	7.1	7.4*	4.8	5.8	3.6	3.8*	3.1	3.1	8.46
0 m			8.3*	8.3*	10.8*	6.7	7.8	4.6	5.7	3.5	4.4*	3.1	3.1	8.25
-1.5 m	7.7*	7.7*	11.7*	11.7*	10.8*	6.6	7.7	4.5	5.7	3.5	5.3*	3.3	3.3	7.75
-3.0 m	11.3*	11.3*	14.1*	12.4	10.0*	6.7	7.5	4.6			6.3*	3.9	3.9	6.9
-4.5 m			11.0*	11.0	8.0*	6.9					6.4*	5.3	5.3	5.51

TRIPLE ARTICULATION - DIPPERSTICK 2940 mm

HEIGHT	RADIUS OF LOAD												REACH m										
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH												
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE											
+9.0 m														3.6*	3.6*	5.33							
+7.5 m														6.3*	6.3*	5.4*	5.4*			3.1*	3.1*	6.93	
+6.0 m												6.6*	6.6*	5.5*	5.5	4.4*	3.7	3.0*	3.0*	7.93			
+4.5 m												11.2*	11.2*	7.6*	7.6*	5.8*	5.4	4.9*	3.9	3.0*	3.0*	8.56	
+3.0 m												15.0*	13.6	9.8*	7.7	6.5*	5.3*	5.1*	3.8	3.0*	2.8	8.89	
+1.5 m												15.7*	13.5*	10.7*	7.5	7.5*	5.1	5.5*	3.6	3.2*	2.7	8.95	
0 m	11.4*	11.4*	16.5*	12.4	10.7*	7.0	7.9*	4.7	5.8	3.4	3.6*	2.8	2.8	8.76									
-1.5 m	14.0*	14.0*	16.6*	12.0	10.9*	6.7	7.9	4.6	5.6	3.3	4.1*	2.9	2.9	8.29									
-3.0 m	16.8*	16.8*	15.5*	12.0	10.5*	6.6	7.2*	4.4				4.3*	3.3	7.49									
-4.5 m	19.9*	19.9*	12.0*	12.0	7.2*	6.5																	

MONO BOOM - DIPPERSTICK 3500 mm

HEIGHT	RADIUS OF LOAD												REACH m					
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH							
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE						
+7.5 m												3.1*	3.1*	6.82				
+6.0 m												3.7*	3.7*	7.84				
+4.5 m												5.2*	5.2*	8.47				
+3.0 m												4.9*	3.8	3.0*	3.0*	8.47		
+1.5 m												5.2*	5.2*	4.9*	3.8	3.0*	3.0*	8.47
0 m	4.2*	4.2*	10.7*	10.7*	9.2*	7.1	6.9*	4.8	5.7	3.5	3.4*	2.8	2.8	8.87				
-1.5 m	7.0*	7.0*	11.3*	11.3*	10.4*	6.6	7.6*	4.5	5.5	3.4	3.8*	2.8	2.8	8.68				
-3.0 m	10.0*	10.0*	14.9*	12.1	10.3*	6.4	7.5	4.4				5.6	3.4	7.4				
-4.5 m	13.7*	13.7*	12.4*	12.3	8.8*	6.6	6.4*	4.5				6.2*	4.4	6.13				

TRIPLE ARTICULATION - DIPPERSTICK 3500 mm

HEIGHT	RADIUS OF LOAD												REACH m									
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		9.0 m			AT MAX REACH								
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE		FRONT	SIDE							
+9.0 m														3.1*	3.1*	6.03						
+7.5 m														4.9*	4.9*					2.8*	2.8*	7.48
+6.0 m														5.0*	5.0*	4.3*	3.8			2.7*	2.7*	8.42
+4.5 m												6.7*	6.7*	5.3*	5.3	4.5*	3.9			2.6*	2.6*	9.01
+3.0 m	19.3*	19.3*	14.2*	13.6	8.5*	7.6	6.0*	5.1	4.7*	3.8	2.8*	1.9	2.7*	2.6	2.9*	2.6	9.32					
+1.5 m	10.3*	10.3*	15.3*	13.3	10.4*	7.4	6.9*	5.0	5.1*	3.6	3.8*	2.6	2.9*	2.5	9.38							
0 m	10.8*	10.8*	16.1*	12.5	10.5*	7.0	7.7	4.7	5.5*	3.4				3.2*	2.5	9.2						
-1.5 m	12.8*	12.8*	16.4*	11.9	10.6*	6.5	7.7	4.5	5.6	3.2				3.7*	2.6	8.76						
-3.0 m	15.0*	15.0*	16.1*	11.8	10.6*	6.4	7.5*	4.3	4.3*	3.2				4.2*	2.9	8.01						
-4.5 m	16.7*	16.7*	13.9*	12.1	8.6*	6.4	4.9*	4.2						3.5*	3.5*	6.86						

All the lift capacity values are in tonnes and without bucket

As per ISO 10567 the indicated load is no more than 87% of hydraulic system lifting capacity or 75% of static tipping load. Values marked with an asterisk are limited by the hydraulic system.

LIFTING CAPACITY

LCVERSION

MONO BOOM - DIPPERSTICK 2080 mm

HEIGHT	RADIUS OF LOAD													
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH		REACH m	
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE		
+7.5 m												6.4*	6.4*	5.12
+6.0 m							6.2*	5.8				6.2*	5.2	6.42
+4.5 m			10.9*	10.9*	7.8*	7.8*	6.6*	5.6				6.1*	4.3	7.19
+3.0 m					9.5*	7.9	7.3*	5.4	6.0	4.0		5.9	3.9	7.58
+1.5 m					10.7*	7.5	7.9*	5.1	5.9	3.9		5.7	3.8	7.65
0 m					11.0*	7.3	7.9*	5.0				5.9	3.9	7.43
-1.5 m			13.5*	13.5*	10.5*	7.3	7.8	5.0				6.5	4.2	6.87
-3.0 m			11.9*	11.9*	9.1*	7.4						6.9*	5.2	5.88
-4.5 m												6.3*	6.3*	4.15

MONO BOOM - DIPPERSTICK 2400 mm

HEIGHT	RADIUS OF LOAD													
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH		REACH m	
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE		
+7.5 m												4.9*	4.9*	5.59
+6.0 m							5.8*	5.8*				4.7*	4.7*	6.8
+4.5 m					7.3*	7.3*	6.2*	5.6	4.9*	4.1		4.7*	4.0	7.52
+3.0 m					8.9*	8.0	6.9*	5.4	5.9	3.9		5.0*	3.7	7.9
+1.5 m					10.3*	7.5	7.6*	5.1	5.8	3.8		5.3	3.5	7.97
0 m			7.6*	7.6*	10.9*	7.2	7.8	4.9	5.7	3.7		5.5	3.6	7.76
-1.5 m	8.6*	8.6*	12.7*	12.7*	10.6*	7.1	7.7	4.9				6.0	3.9	7.22
-3.0 m	13.4*	13.4*	12.8*	12.8*	9.5*	7.3	7.0*	5.0				6.6*	4.7	6.29
-4.5 m			9.1*	9.1*	6.8*	6.8*						6.4*	6.4*	4.72

MONO BOOM - DIPPERSTICK 2940 mm

HEIGHT	RADIUS OF LOAD													
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH		REACH m	
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE		
+7.5 m							4.2*	4.2*				3.5*	3.5*	6.27
+6.0 m							5.3*	5.3*				3.4*	3.4*	7.36
+4.5 m							5.8*	5.7	5.1*	4.1		3.4*	3.4*	8.04
+3.0 m			12.9*	12.9*	8.3*	8.2	6.6*	5.5	5.7*	4.0		3.5*	3.4	8.39
+1.5 m			7.1*	7.1*	9.9*	7.6	7.4*	5.2	5.8	3.9		3.8*	3.3	8.46
0 m			8.3*	8.3*	10.8*	7.3	7.8	5.0	5.7	3.8		4.4*	3.3	8.25
-1.5 m	7.7*	7.7*	11.7*	11.7*	10.8*	7.2	7.7	4.9	5.7	3.7		5.3*	3.6	7.75
-3.0 m	11.3*	11.3*	14.1*	13.7*	10.0*	7.2	7.5	4.9				6.3*	4.2	6.9
-4.5 m			11.0*	11.0*	8.0*	7.4						6.4*	5.7	5.51

MONO BOOM - DIPPERSTICK 3500 mm

HEIGHT	RADIUS OF LOAD													
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH		REACH m	
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE		
+7.5 m												3.1*	3.1*	6.82
+6.0 m									3.7*	3.7*		3.0*	3.0*	7.84
+4.5 m							5.2*	5.2*	4.9*	4.1		3.0*	3.0*	8.47
+3.0 m			10.8*	10.8*	7.4*	7.4*	6.0*	5.4	5.3*	3.9		3.1*	3.1*	8.81
+1.5 m			10.7*	10.7*	9.2*	7.6	6.9*	5.1	5.8*	3.8		3.4*	3.0	8.87
0 m	4.2*	4.2*	9.2*	9.2*	10.4*	7.2	7.6*	4.9	5.6	3.6		3.8*	3.0	8.68
-1.5 m	7.0*	7.0*	11.3*	11.3*	10.7*	7.0	7.6	4.7	5.5	3.6		4.6*	3.2	8.21
-3.0 m	10.0*	10.0*	14.9*	13.4	10.3*	7.0	7.6	4.7				5.7*	3.6	7.4
-4.5 m	13.7*	13.7*	12.4*	12.4*	8.8*	7.1	6.4	4.8				6.2*	4.7	6.13

TRIPLE ARTICULATION - DIPPERSTICK 2080 mm

HEIGHT	RADIUS OF LOAD													
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH		REACH m	
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE		
+7.5 m												7.4*	7.4*	5.12
+6.0 m							7.6*	7.6*	6.2*	5.8*		5.0*	4.6*	6.97
+4.5 m			11.9*	11.9*	8.8*	8.5	6.5*	5.8	5.1*	4.1		4.6*	3.9	7.68
+3.0 m			13.7*	13.7*	10.5*	8.3	7.3*	5.6	5.6*	4.0		4.6*	3.6	8.05
+1.5 m			16.4*	14.3	10.8*	8.0	8.0	5.4	5.8	3.8		4.6*	3.4	8.12
0 m			16.8*	13.7	10.9*	7.5	8.0	5.1	5.7	3.7		4.9*	3.5	6.94
-1.5 m	19.6*	19.6*	16.2*	13.7	10.9*	7.4	7.8*	5.0				5.1*	3.8	7.38
-3.0 m	23.0*	23.0*	14.3*	14.0*	9.4*	7.4*	5.2*	4.9				4.2*	4.2*	6.48

TRIPLE ARTICULATION - DIPPERSTICK 2400 mm

HEIGHT	RADIUS OF LOAD													
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH		REACH m	
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE		
+9.0 m												5.1*	5.1*	4.4
+7.5 m							7.0*	7.0*	4.3*	4.3*		4.4*	4.4*	6.2
+6.0 m							7.2*	7.2*	5.9*	5.8		4.2*	4.2*	7.3
+4.5 m			12.8*	12.8*	8.3*	8.3*	6.2*	5.7*	5.1*	4.1		4.1*	3.6	8.0
+3.0 m			14.4*	14.4*	10.3*	8.3	6.9*	5.6*	5.4*	4.0		4.2*	3.3	8.3
+1.5 m			16.0*	14.5*	10.7*	8.0*	7.9*	5.4*	5.8*	3.8		4.2*	3.2	8.4
0 m	16.2*	16.2*	16.6*	13.7*	10.7*	7.5*	7.9*	5.1*	5.7*	3.7		4.5*	3.2	8.2
-1.5 m	16.7*	16.7*	16.4*	13.6*	10.8*	7.3*	7.8*	4.9*				4.9*	3.5	7.7
-3.0 m	20.8*	20.8*	15.1*	13.8*	9.9*	7.3*	6.2*	4.9*				4.2*	4.1*	6.8
-4.5 m			9.1*	9.1*										

TRIPLE ARTICULATION - DIPPERSTICK 2940 mm

HEIGHT	RADIUS OF LOAD														
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH		REACH m		
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE			
+9.0 m							5.8*	5.8*				3.6*	3.6*	5.33	
+7.5 m							6.3*	6.3*	5.4*	5.4*		3.1*	3.1*	6.93	
+6.0 m							6.6*	6.6*	5.5*	5.5*	4.4*	4.1	3.0*	3.0*	7.93
+4.5 m			11.2*	11.2*	7.6*	7.6*	5.8*	5.8	4.9*	4.2		3.0*	3.0*	8.56	
+3.0 m	12.0	12.0	15.0*	14.8*	9.8*	8.4	6.5*	5.7	5.1*	4.1		3.0*	3.0*	8.89	
+1.5 m	18.5*	18.5*	15.7*	14.6	10.7*	8.1	7.5*	5.4	5.5*	3.9		3.2*	3.0	8.95	
0 m	11.3*	11.3*	16.5*	14.0	10.7*	7.7	7.9	5.2	5.8	3.7		3.6*	3.0	8.76	
-1.5 m	14.0*	14.0*	16.6*	13.6	10.9*	7.4	7.9	5.0	5.7	3.6		4.1*	3.2	8.29	
-3.0 m	16.8*	16.8*	15.5*	13.7	10.5*	7.3	7.2*	4.9				4.3*	3.7	7.5	
-4.5 m	19.9*	19.9*	12.0*	12.0*	7.2*	7.2*									

TRIPLE ARTICULATION - DIPPERSTICK 3500 mm

HEIGHT	RADIUS OF LOAD														
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		AT MAX REACH		REACH m		
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE			
+9.0 m												3.1*	3.1*	6.03	
+7.5 m									4.9*	4.9*		2.8*	2.8*	7.48	
+6.0 m									5.0*	5.0*	4.3*	4.1	2.7*	2.7*	8.42
+4.5 m							6.7*	6.7*	5.3*	5.3*	4.5*	4.2	2.6*	2.6*	9.01
+3.0 m	19.3*	19.3*	14.2*	14.2*	8.5*	8.2	6.0*	5.5*	4.7*	4.1		2.7*	2.7*	9.32	
+1.5 m	10.3*	10.3*	15.3*	14.4*	10.4*	8.1	6.9*	5.3	5.1*	3.9		2.9*	2.7	9.38	
0 m	10.8*	10.8*	16.1*	14.2	10.5*	7.7	7.7*	5.2	5.5*	3.7		3.2*	2.7	9.2	
-1.5 m	12.8*	12.8*	16.4*	13.6	10.6*	7.3	7.7	4.9	5.6	3.5		3.7*	2.9	8.76	
-3.0 m	15.0*	15.0*	16.1*	13.4	10.6*	7.1	7.5*	4.7	4.3*	3.5		4.2*	3.2	8.01	
-4.5 m	16.7*	16.7*	13.9*	13.4*	8.6*	7.1*	4.9*	4.7				3.5*	3.5*	6.85	

All the lift capacity values are in tonnes and without bucket

As per ISO 10567 the indicated load is no more than 87% of hydraulic system lifting capacity or 75% of static tipping load. Values marked with an asterisk are limited by the hydraulic system.


E215C LONG REACH

DIMENSIONS AND OPERATING WEIGHTS

Boom length 8.75 m

Long Reach

Overall transport height	mm	3140
Overall transport length	mm	12680

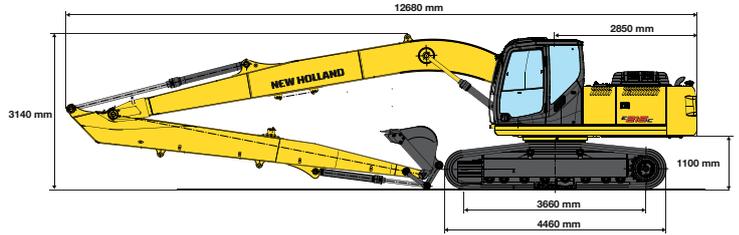

Long Reach


M - Shoe width	mm	600	700	800	900
Operating weight	kg	22860	23130	23400	23700
Ground pressure	bar	0.51	0.44	0.39	0.35

DIGGING PERFORMANCE

ARM	6350
A - Max. digging reach	mm 15820
B - Max. digging reach at ground level	mm 15710
C - Max. digging depth	mm 11870
C' - 2,4 mt level digging depth	mm 11660
D - Max. digging height	mm 13930
E - Max. dumping clearance	mm 11550
Bucket capacity SAE heaped	m ³ 0.45

BREAKOUT FORCE

ARM	6350
Bucket	daN 10100
Dipperstick	daN 5600

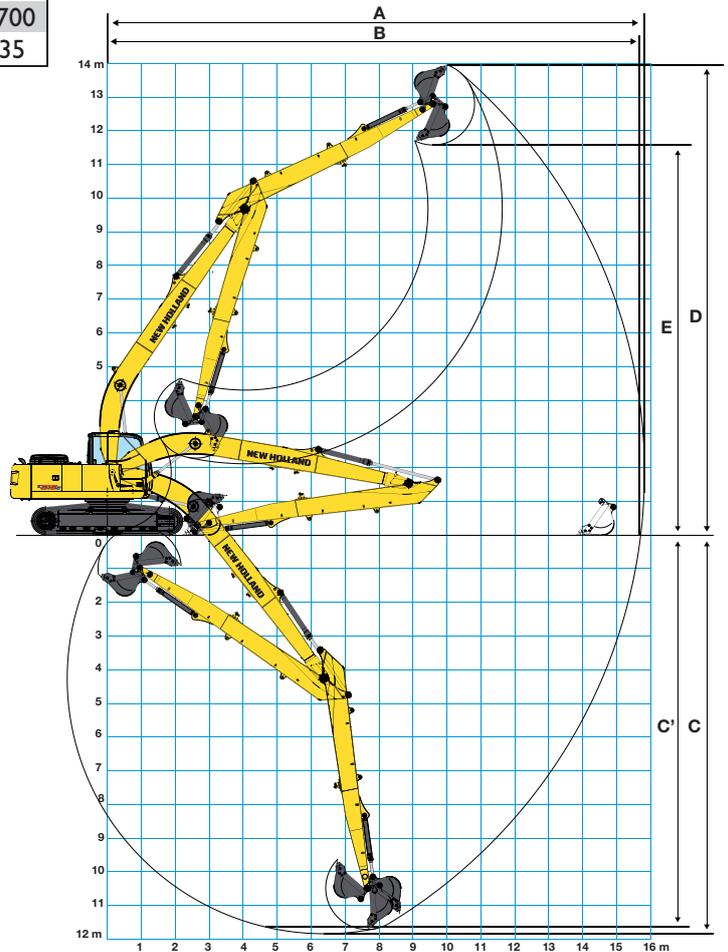


LIFTING CAPACITY

LC VERSION - DIPPERSTICK 6350 mm


HEIGHT	RADIUS OF LOAD																		AT MAX REACH		REACH m	
	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		9.0 m		10.5 m		12.0 m		13.5 m		FRONT	SIDE		
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE		
+12.0 m																				1.0*	1.0*	10.77
+10.5 m																				0.9*	0.9*	12.02
+9.0 m																				0.9*	0.9*	12.98
+7.5 m																				0.9*	0.9*	13.7
+6.0 m																				0.9*	0.9*	14.23
+4.5 m																				0.9*	0.9*	14.59
+3.0 m																				0.9*	0.9*	14.78
+1.5 m			3.2*	3.2*	7.3*	7.3*	5.2*	5.0	4.1*	3.7	3.4*	2.8	3.0*	2.2	2.7*	1.8	2.3	1.4	1.0*	1.0*	14.82	
0 m			2.8*	2.8*	6.5*	6.5	5.9*	4.5	4.5*	3.3	3.7*	2.6	3.2*	2.1	2.7	1.7	2.3	1.4	1.0*	1.0*	14.71	
-1.5 m	2.4*	2.4*	3.4*	3.4*	5.9*	5.9*	6.3*	4.1	4.8*	3.1	3.9*	2.4	3.2	1.9	2.6	1.6	2.2	1.3	1.1*	1.1*	14.44	
-3.0 m	3.2*	3.2*	4.1*	4.1*	6.3*	5.8	6.4*	3.9	5.0	2.9	3.9	2.3	3.1	1.8	2.6	1.5	2.2*	1.3	1.3*	1.2	14.0	
-4.5 m	4.1*	4.1*	5.0*	5.0*	7.1*	5.8	6.4*	3.8	4.9	2.8	3.8	2.2	3.1	1.8	2.6	1.5			1.5*	1.3	13.58	
-6.0 m	5.0*	5.0*	6.1*	6.1*	8.0*	5.9	6.1*	3.9	4.8*	2.8	3.8	2.2	3.1	1.8	2.6	1.5			1.7*	1.4	12.34	
-7.5 m	6.0*	6.0*	7.3*	7.3*	9.2*	6.1	5.6*	3.9	4.5*	2.9	3.6*	2.2	3.0*	1.8					2.2*	1.7	11.45	
-9.0 m			8.1*	8.1*	10.4*	6.0*	4.8*	4.1	3.8*	3.0	3.0*	2.4							2.5*	2.1	10.0	
-10.5 m					11.6*	4.3*	3.4*	3.4*	2.7*	2.7*									2.4*	2.4*	8.06	

COMPONENT WEIGHTS & DIMENSIONS

E215C BOOM		MONO BOOM	TRIPLE ART.	
			ARM 1	ARM 2
Length	mm	5860	3390	3660
Height	mm	1450	700	930
Width	mm	670	670	550
Weight	kg	1566	1087	1040



E215C ARM		2100	2400	2940	3500
Length	mm	3080	3410	3940	4540
Height	mm	880	870	870	870
Width	mm	350	350	350	350
Weight	kg	718	727	823	999



E215C LONG REACH		MONO BOOM	ARM
Length	mm	8960	7370
Height	mm	1490	820
Width	mm	670	350
Weight	kg	2196	1189

Includes arm and bucket cylinders linkage, piping & pin.

		E215C	E215C LR
Counterweight	kg	4900	5900

STANDARD EQUIPMENT

- Tier 4 interim Engine 6 cylinders 6.7 liters
- SCR Engine Technology
- H.A. O.A. (Hydrotronic active operation aid)
- C.P.B. (Continuous Power Boost)
- Auto-Idling device
- I track guide for each side
- Two travel speed with Automatic Down Shift device
- Automatic fuel electrical pump
- Tool box
- Centralized boom lubrication
- Grease bath swing ring
- Standard -25° C engine cold start aid
- Rear mirror
- Rear view camera
- Two spot lights on lifting boom
- Cab with structures compliant per ISO 12177-2 (ROPS) and ISO 10262 (FOPS)
- Transparent cab roof and opening front window
- Mechanical seat suspension
- Adjustable armrests
- New generation A.E.P. (Advanced Electronic Processor)
- Multi-function control monitor with integrated rearview camera, mode and attachments selection, gauges for coolant temperature, fuel tank, diesel exhaust tank and fuel economy. Menu functions for fuel consumption graphing, maintenance schedules, system status. Auto-Idling mode selector.
- Automatic air conditioner
- Radio USB&Bluetooth with speakers set
- Heavy lift switch
- Pressure drain switch
- Horn

OPTIONS

- Antitheft device
- Rotating beacon
- Cab additional lights and rain protection
- Cab front guard
- Lower frame cover
- Arm protection
- Front and rear additional track guide
- Hydraulic quick coupler provision
- Object handling kit
- Customer color
- Heated air suspension seat
- Hammer and crusher circuit with foot control
- Hammer and crusher circuit HPC (Hydraulic Proportional Control)
- Hammer, crusher and extra circuit (Hydraulic Proportional Control)
- One piece boom, triple articulation (2 piece boom)
- Arm :
 - 2080
 - 2400
 - 2940
 - 3500
- Super Long Front boom and arm 15 m (LC only)
- Shoes: EL version 500 - 600 - 700 mm
 - L version 600 - 700 - 800 - 900 mm
 - LC version 600 - 700 - 800 - 900 mm

Note: standard and optional equipment may vary by country. Consult your NEW HOLLAND dealer for specific details.

PARTS AND SERVICE

The New Holland dealer network is, in itself, the best guarantee of continued productivity for the machines it delivers to its customers. New Holland service technicians are fully equipped to resolve all maintenance and repair issues, with each and every service point providing the high standards they are obliged to observe under New Holland's stringent quality guidelines. The New Holland global parts network ensures fast, reliable, replacement parts for less downtime, increased productivity and, of course, profitable operation for its customers.



AT YOUR OWN DEALERSHIP

The information contained in this brochure is intended to be of general nature only. The NEW HOLLAND KOBELCO CONSTRUCTION MACHINERY S.p.A. company may at any time and from time to time, for technical or other necessary reasons, modify any of the details or specifications of the product described in this brochure. Illustrations do not necessarily show products in standard conditions. The dimensions, weights and capacities shown herein, as well as any conversion data used, are approximate only and are subject to variations within normal manufacturing techniques.

Published by NEW HOLLAND KOBELCO CONSTRUCTION MACHINERY S.p.A.
Printed in Italy - MediaCross Firenze - Cod 30653GB - Printed 05/12

Printed on recycled paper
CoC-FSC 000010 CQ Mixed sources



ELEMENTAL
CHLORINE
FREE
GUARANTEED



www.newholland.com

